

CDM6240

Single Cash Dispenser



The single cash dispenser CDM6240, with full independent intellectual property rights of GRGBanking, is of high security and large capacity. It is recommended to be integrated in retail ATM, ticket vending machine and other self-service machine. It has integrated numbers of world advanced dispensing technologies, and offers high and stable performance at a very low total cost of ownership.

CDM6240

Single Cash Dispenser

CDM6240 single cash dispenser Module provides 4 advanced features of GRG's leading technology with all independent intellectual property rights owned by GRG.

Features

Reliable

- ◆ Opto-Electrical Detecting, able to recognize overlapped, folded, or worn notes
- ◆ High security cassettes and a separate reject tray with lock and seal-leading
- ◆ Unique log record and inquiry function, enables to record and check every transaction


Intelligent

- ◆ Cassette low level detection function to ensure in time cash replenishment
- ◆ Offline Diagnosis system makes troubleshooting very simple
- ◆ Radio Frequency Identification technique (Optional), enables to store the cassette ID, cash loader in formation and loaded cash information


Flexible

- ◆ Modular design, easy to assemble and disassemble
- ◆ Front or rear service access for convenient maintenance
- ◆ Onsite replacement of wearing parts
- ◆ High process speed and capacity
- ◆ Friction feed, able to handle various currencies
- ◆ Dispensing at a high speed of 7 notes per second
- ◆ Maximum 2,200 notes per cassette, expandable up to 6 cassettes, 13,200 notes in total

Dimensions

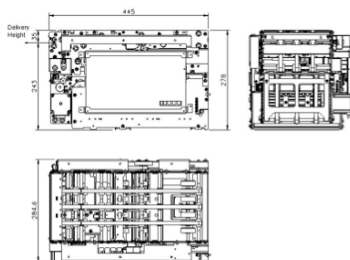

Rear Service Dimensions (mm)

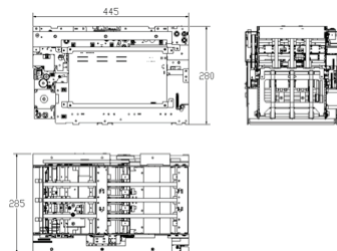

Front Service Dimensions (mm)

The dimensions above are based on single cassette height, with the increase of every cassette, the height shall be added by 142.5mm.

Specifications

Media Ranges

- ◆ Length: 110mm -172 mm
- ◆ Width: 55mm -85 mm
- ◆ Thickness: 0.06mm -0.18 mm
- ◆ Dispensing system: Friction feed, single dispensing, 7 notes/second
- ◆ Maximum notes per transaction: 100 notes
- ◆ Low level detection: 50-250 notes (adjustable)
- ◆ Reject tray capacity: Single reject, minimum 100 notes
- ◆ Maintenance: Front/Rear

Note Cassette

- ◆ Expandability: Up to 6
- ◆ Cassette capacity: 2,200 notes
- ◆ Security: Mechanical lock and lead sealing

Weight

- ◆ 16.9 Kg, 1 cassette weight, with the increase of every cassette, the weight shall be added by 9.9kg

Communication Interface

- ◆ RS-232/ USB (optional)

Operating Environment

- ◆ Temperature: 0 C -50 C
- ◆ Humidity: 20% - 90% non-condensing

Power Supply

- ◆ Input voltage: DC 24V, 200W
- ◆ Consumption: Idle 10W; Operating 50W

GRGBanking Equipment Co., Ltd

Add: 9,11 Kelin Road, Science City, High-tech Industrial Development Zone, Guangzhou, China 510663
Tel: +86 20 6287 9763
Email: oem@grgbanking.com

Specifications are subject to update without prior notice. Please consult GRGBanking or its representative for the latest information.