


CDM6240S

Single Cash Dispenser

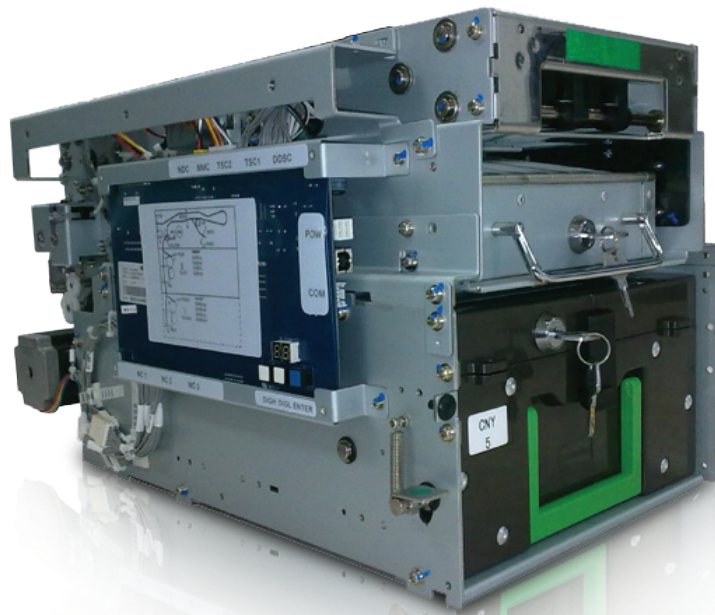

The single cash dispenser CDM6240s, with full independent intellectual property rights of GRGBanking is a simplified version of the single cash dispenser CDM6240 with lower dispensing speed and maximum 3 cassettes. It is designed for low-end, low-transaction retail and non-banking sectors, but offers the same functionalities and high performance as CDM6240 while the total cost of ownership is significantly reduced.

CDM6240S

Single Cash Dispenser

CDM6240S single cash dispenser Module provides 4 advanced features of GRG's leading technology with all independent intellectual property rights owned by GRG.

Features

Reliable

- ◆ Sensitive Opto-Electrical Detection delivers very good performance in detecting double notes
- ◆ High security cassettes and a separate reject tray with lock and seal-leading.
- ◆ Unique log record and inquiry function, enables to record and check the transactions of minimum three months


Intelligent

- ◆ Cassette low level detection function to ensure in time cash replenishment
- ◆ Offline Diagnosis system makes troubleshooting very simple
- ◆ Radio Frequency Identification technique (Optional), enables to store the cassette ID, cash loader information and loaded cash information


Flexible

- ◆ Modular design, easy to assemble and disassemble
- ◆ Front or rear service access for convenient maintenance
- ◆ Onsite replacement of wearing parts
- ◆ High process speed and capacity
- ◆ Friction feed, able to handle various currencies
- ◆ Dispensing at a high speed of 4 notes per second
- ◆ Maximum 2,200 notes per cassette, expandable up to 3 cassettes, 6,600 notes in total

Dimensions

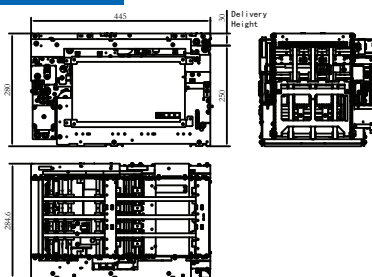

Front Service Dimensions (mm)

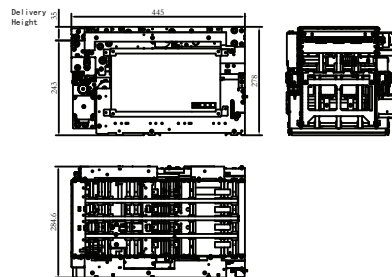

Rear Service Dimensions (mm)

The dimensions above are based on single cassette height, with the increase of every cassette, the height shall be added by 142.5mm.

Specifications

Media Ranges

- ◆ Length: 110mm -172 mm
- ◆ Width: 55mm -85 mm
- ◆ Thickness: 0.06mm -0.18 mm
- ◆ Dispensing system: Friction feed, single dispensing, 4 notes/second
- ◆ Maximum notes per transaction: 50 notes
- ◆ Low level detection: 50-250 notes (adjustable)
- ◆ Reject tray capacity: Single reject, minimum 100 notes
- ◆ Maintenance: Front/Rear

Note Cassette

- ◆ Expandability: Up to 3
- ◆ Cassette capacity: 2,200 notes
- ◆ Security: Mechanical lock and lead sealing

Weight

- ◆ 16.9 Kg, 1 cassette weight, with the increase of every cassette, the weight shall be added by 9.9kg

Communication Interface

- ◆ RS-232/ USB (optional)

Operating Environment

- ◆ Temperature: 0 C - 50 C
- ◆ Humidity: 20% - 90% non-condensing

Power Supply

- ◆ Input voltage: DC 24V, 200W
- ◆ Consumption: Idle 10W; Operating 50W

GRGBanking Equipment Co., Ltd

Add: 9,11 Kelin Road, Science City, High-tech Industrial Development Zone, Guangzhou, China 510663
Tel: +86 20 6287 9763
Email: oem@grgbanking.com

Specifications are subject to update without prior notice. Please consult GRGBanking or its representative for the latest information.